



push-button switch

Description of basic version

single pole normally open
 push button pusher and housing
 PA nature glass fiber reinforced
 contact pairing Ag/Ag
 terminals silver-plated
 contact pairing: snap-action contact
 life endurance mech: 100.000
 electr: 10.000


pre-travel max 3,3
 over-travel min 3,4
 movement differential max 2,3

actuating force 3,50N ± 0,50

plug-in terminal



1117.0101

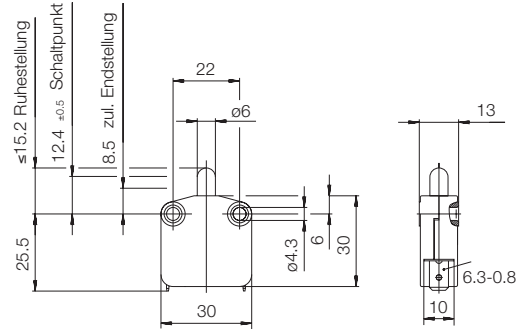

electrical rating and approval marks

printed (injected):



16(6)/400~ T 85
 12A 125-250V AC
 1/6 HP 125V AC
 1/2 HP 250V AC



switching function


normally open

normally closed



switching function

normally closed

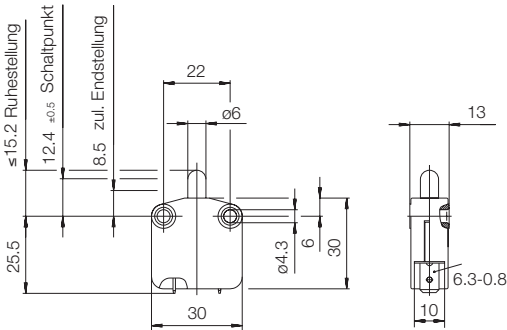

remarks



