

## KATALOGOVÝ LIST - PATICE PLCC Z

<b>PLCC20Z</b>	PLCC Socket 28Pole Sn PKU=32
<b>PLCC28Z</b>	PLCC Socket 32Pole Sn PKU=28
<b>PLCC32Z</b>	PLCC Socket 44Pole Sn PKU=24
<b>PLCC44Z</b>	PLCC Socket 52Pole Sn PKU=22
<b>PLCC52Z</b>	PLCC Socket 52Pole Sn PKU=18
<b>PLCC68Z</b>	PLCC Socket 68Pole Sn PKU=18
<b>PLCC84Z</b>	PLCC Socket 68Pole Sn PKU=16

### Features

- RoHS compliant

### Technical Specifications

Insulator:	Thermoplastic Glass-filled, UL94V-0
Contact Material:	Phosphor Bronze
Contact Surface:	2 $\mu$ Nickel, 3 $\mu$ Tin
Operating Current:	1A
Electrical Strength:	500V AC/1 Min.
Insulation Resistance, Min.:	>1000M $\Omega$
Contact Resistance, Max.:	30m $\Omega$
Temperature Range:	-55...+110°C

### Dimensions

PLCC_	A <sup>±0,15</sup> [mm]	B <sup>±0,15</sup> [mm]	C <sup>±0,15</sup> [mm]	D <sup>±0,15</sup> [mm]	E <sup>±0,15</sup> [mm]	F <sup>±0,15</sup> [mm]
<b>20Z</b>	15,50	15,50	5,08	5,08	5,08	5,08
<b>28Z</b>	18,04	18,04	7,62	7,62	7,62	7,62
<b>32Z</b>	18,04	20,54	7,62	10,16	7,62	10,16
<b>44Z</b>	23,48	23,48	12,70	12,70	12,70	12,70
<b>52Z</b>	25,88	25,88	15,24	15,24	15,24	15,24
<b>68Z</b>	31,04	31,04	20,32	20,32	20,32	20,32
<b>84Z</b>	36,04	36,04	25,40	25,40	25,40	25,40


### Terms of Delivery

Minimum order quantity: 1 PKU = 10 pieces


### Manufacturer

Various

**KATALOGOVÝ LIST - PATICE PLCC Z**

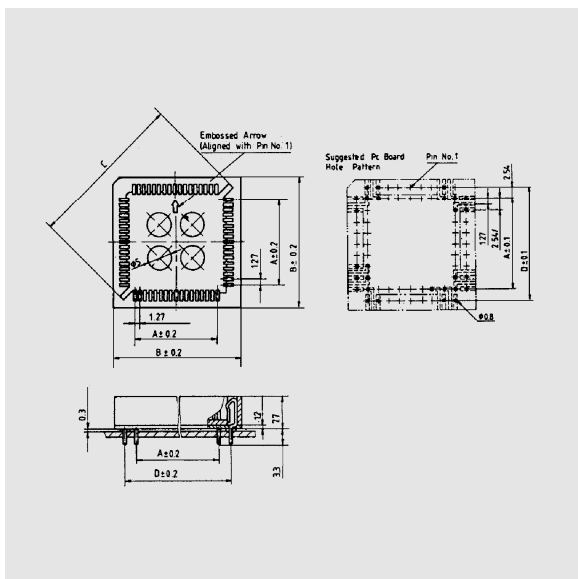

**PLCC Z**

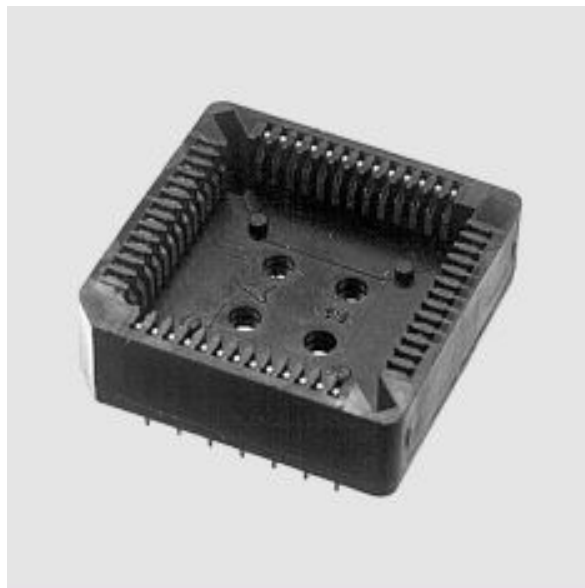

**PLCC Z**