



Description of basic version

rocker switch

double pole DT-switch

actuation cap: soft component TPE black
hard component PC black


socket and housing PA black additional printing switch:
contact pairing Ag/Ag production year/week
terminals silver-plated according to DIN EN 60062

contact type: delamination contact

life endurance mech: 50.000
electr 10(8): 50.000
16(4): 10.000


suitable for appliances
of protection class II

2a 2 2b




1a 1 1b

plug-in terminal 6,3



1934.3112

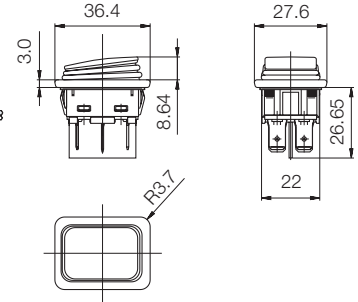



panel thickn	length of cut-out	width of cut-out
0,75 - 1,25	30 - 0,1	22 + 0,2
1,25 - 3	30,2 - 01	22 + 0,2

snap-on fixing for panel thicknesses of 0,75 ... 3,0 mm


electrical rating and approval marks

printed (injected):

10(8)/250~ 5E4
5/100A 250~T 105/55 
12A 125-250V AC
1/2 HP 125V AC R 182 
1 HP 250V AC

switching function







DT-switch



remarks

The IP-protection class indicated in our documents refers to the operating side of the switch, if it is installed into the customer appliance. The sealing between switch and appliance can be made by the circular seal of the operating cap. The installation into the customer appliance and the test for leaks are effected by the customer. Switches with damaged operating caps must be exchanged immediatly.



product No	kind of terminal	Po	S	F	tolerances to basic model	
3112 x	P_I 6,3					
3113	P-I 6,3				actuation cap (hard component) red with marking white	
3114	P-I 6,3				actuation cap with marking white	
3115	P-I 6,3				marking white	
3126	P-I 6,3				marking white	 additional printing packing: 6.632-403.0
3221	P-I 6,3		C	C	marking white	<div style="display: flex; align-items: center;"> <div style="margin-right: 20px;">  </div> <div>  </div> </div> <p style="margin-left: 100px;">without rating marking additional printing packing: 6.632-402.0</p>