


Potenciometry drátové 30W

Technické parametry

Jmenovité zatížení při 40°C	10W
Rozsah hodnot	10 Ω až 10 kΩ
Řada	E3
Minimální odběr	1ks

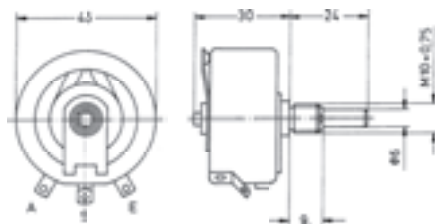


Obj.č	TYP	Cena	Popis
1516839	PZD30WE010	747,20	10R
1516840	PZD30WE022	747,20	22R
1516841	PZD30WE033	747,20	33R
1516842	PZD30WE047	747,20	47R
1516843	PZD30WE100	747,20	100R
1516844	PZD30WE220	747,20	220R

Obj.č	TYP	Cena	Popis
1516845	PZD30WE470	747,20	470R
1516846	PZD30WK001	747,20	1K
1521902	PZD30WK002,2	747,20	2K2
1516847	PZD30WK004,7	747,20	4K7
1516848	PZD30WK010	809,68	10K

Potenciometry drátové 60W

Technické parametry

Jmenovité zatížení při 40°C	60W
Rozsah hodnot	10 Ω až 4,7 kΩ
Řada	E3
Minimální odběr	1ks

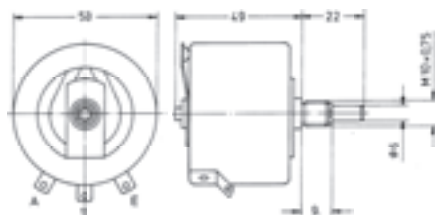

Obj.č	TYP	Cena	Popis
1521903	PZD60WE010	997,10	10R
1521904	PZD60WE022	997,10	22R
1521905	PZD60WE047	997,10	47R
1521906	PZD60WE100	997,10	100R
1521907	PZD60WE220	997,10	220R

Obj.č	TYP	Cena	Popis
1521908	PZD60WE470	997,10	470R
1521909	PZD60WK001	997,10	1K
1521910	PZD60WK002,2	997,10	2K2
1521911	PZD60WK004,7	997,10	4k7

Doplňky pro víceotáčkové potenciometry typ 534

Obj.č.	Typ	Min.ks	Cena	Popis
1521891	DIAL11111	1	532,29	Chrom. stup., hl. kryt, černé znač.
1528587	DIAL15111	1	684,73	Stupnice chromovaná (pro 534) 10ti otáčková, 3 číslice
1528588	DIAL21111	1	579,77	Stupnice chromovaná, 15tiotáčková, 46,02mm





Termistory NTC

Termistory NTC K164, 10%, RM 5

Technické parametry

Maximální zatížení při 25°C	0,45W
Rozsah hodnot	10 Ω až 4,7 kΩ
Rozsah teplot	-55 až 125 °C
Tolerance	±10%
Nominální teplota	25°C
Řada	E3
Minimální objednávk. množství	10ks



Obj.č	TYP	Cena	Popis
1509281	K164NE100-10	5,85	100R
1509282	K164NE470-10	7,15	470R
1509283	K164NK001-10	7,15	1K
1509284	K164NK001,5-10	7,15	1K5
1509285	K164NK002,2-10	7,15	2K2
1508313	K164NK004,7-10	5,85	4K7

Obj.č	TYP	Cena	Popis
1509286	K164NK006,8-10	5,85	6K8
1509287	K164NK010-10	5,85	10K
1508314	K164NK015-10	7,15	15K

Obj.č	TYP	Cena	Popis
1509288	K164NK022-10	7,15	22K
1509289	K164NK047-10	7,15	47K
1509290	K164NK100-10	7,15	100K