


## Cívky pro sínané zdroje s vysokou účinností, TALEMA, SDF

## Technické parametry

|                 |                   |
|-----------------|-------------------|
| Rozměry         | 17,5 × 15 × 11 mm |
| Ød              | 0,6mm - 1,18mm    |
| Minimální odběr | 5ks               |

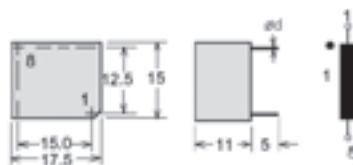


| Obj.č   | TYP         | Ød[mm] | E [mJ] | R <sub>dc</sub> [mΩ] | I <sub>N</sub> [A] | Cena   | Popis |
|---------|-------------|--------|--------|----------------------|--------------------|--------|-------|
| 1513112 | SDF63A6,3   | 1,18   | 1250   | 17                   | 6,30               | 219,91 | 63μH  |
| 1513111 | SDF100A5,0  | 0,75   | 1250,0 | 27                   | 5,00               | 214,91 | 100μH |
| 1514152 | SDF160A1,6  | 0,8    | 205,0  | 127                  | 1,60               | 92,46  | 160μH |
| 1513104 | SDF250A1,0  | 0,6    | 125,0  | 354                  | 1,00               | 87,46  | 250μH |
| 1522222 | SDF250A3,15 | 0,56   | 1240,0 | 85                   | 3,15               | 207,42 | 250μH |
| 1513102 | SDF500A0,63 | 0,6    | 99,0   | 670                  | 0,63               | 84,97  | 500μH |
| 1513105 | SDF500A1,0  | 0,6    | 250    | 210                  | 1,00               | 172,43 | 500μH |

## Cívky spínané zdroje toroidní, 0,5A TALEMA, DPU

## Technické parametry

|                    |               |
|--------------------|---------------|
| Rozsah indukčnosti | 100μH - 470μH |
| Minimální odběr    | 10ks          |

| Obj.č   | TYP        | LN[μH] | E[mJ] | R <sub>dc</sub> [Ω] | I <sub>N</sub> [A] | a[mm] | b[mm] | Cena  | Popis |
|---------|------------|--------|-------|---------------------|--------------------|-------|-------|-------|-------|
| 1509347 | DPU100A0,5 | 100    | 12,5  | 0,140               | 0,50               | 14    | 8     | 16,99 | 100μH |
| 1509348 | DPU150A0,5 | 150    | 18,8  | 0,173               | 0,50               | 15    | 8     | 17,99 | 150μH |
| 1509349 | DPU220A0,5 | 220    | 27,5  | 0,215               | 0,50               | 15    | 9     | 19,49 | 220μH |
| 1509350 | DPU330A0,5 | 330    | 41,3  | 0,265               | 0,50               | 15    | 9     | 19,49 | 330μH |
| 1510943 | DPU470A0,5 | 470    | 58,8  | 0,322               | 0,50               | 20    | 9     | 25,49 | 470μH |

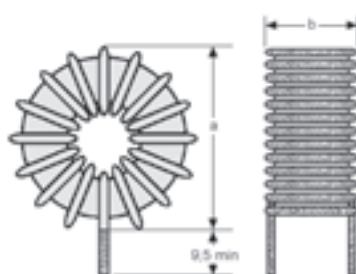


## Cívky pro spínané zdroje toroidní 1A, TALEMA, DPU

## Technické parametry

|                    |               |
|--------------------|---------------|
| Rozsah indukčnosti | 68μH - 1000μH |
| Minimální odběr    | 10ks          |

| Obj.č   | TYP       | L <sub>N</sub> [μH] | E [μJ] | R <sub>dc</sub> [Ω] | I <sub>N</sub> [A] | a[mm] | b[mm] | Cena  | Popis  |
|---------|-----------|---------------------|--------|---------------------|--------------------|-------|-------|-------|--------|
| 1509351 | DPU033A1  | 33                  | 16,5   | 0,052               | 1,00               | 14    | 8     | 16,49 | 33μH   |
| 1509352 | DPU047A1  | 47                  | 23,5   | 0,063               | 1,00               | 14    | 8     | 16,49 | 47μH   |
| 1509353 | DPU068A1  | 68                  | 34     | 0,077               | 1,00               | 14    | 8     | 16,99 | 68μH   |
| 1509354 | DPU100A1  | 100                 | 50,0   | 0,097               | 1,00               | 15    | 8     | 16,99 | 100μH  |
| 1509355 | DPU150A1  | 150                 | 75,0   | 0,123               | 1,00               | 15    | 9     | 18,99 | 150μH  |
| 1509356 | DPU220A1  | 220                 | 110,0  | 0,196               | 1,00               | 15    | 9     | 19,49 | 220μH  |
| 1509357 | DPU330A1  | 330                 | 165,0  | 0,193               | 1,00               | 20    | 9     | 25,49 | 330μH  |
| 1510944 | DPU470A1  | 470                 | 235,0  | 0,180               | 1,00               | 27    | 12    | 36,49 | 470μH  |
| 1510946 | DPU1000A1 | 1000                | 500,0  | 0,426               | 1,00               | 26    | 13    | 39,48 | 1000μH |

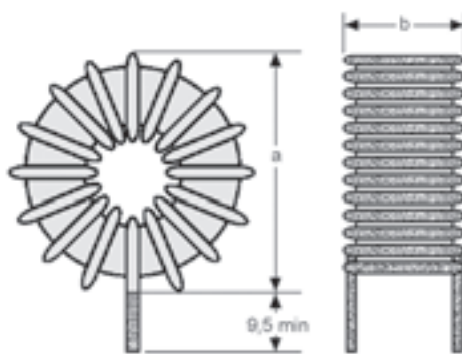

## Cívky pro spínané zdroje toroidní 2A, TALEMA, DPU

## Technické parametry

|                    |              |
|--------------------|--------------|
| Rozsah indukčnosti | 22μH - 330μH |
| Minimální odběr    | 10ks         |

| Obj.č   | TYP      | L <sub>N</sub> [μH] | E [μJ] | R <sub>dc</sub> [Ω] | I <sub>N</sub> [A] | Cena  | Popis |
|---------|----------|---------------------|--------|---------------------|--------------------|-------|-------|
| 1516506 | DPU022A2 | 22                  | 44,0   | 0,070               | 2,00               | 15,49 | 22μH  |
| 1516507 | DPU047A2 | 47                  | 94,0   | 0,090               | 2,00               | 16,49 | 47μH  |
| 1516508 | DPU068A2 | 68                  | 136,0  | 0,089               | 2,00               | 16,99 | 68μH  |
| 1516509 | DPU100A2 | 100                 | 200,0  | 0,109               | 2,00               | 21,49 | 100μH |
| 1516519 | DPU150A2 | 150                 | 300,0  | 0,106               | 2,00               | 30,99 | 150μH |
| 1516522 | DPU220A2 | 220                 | 440,0  | 0,153               | 2,00               | 27,99 | 220μH |
| 1516531 | DPU330A2 | 330                 | 660,0  | 0,202               | 2,00               | 34,49 | 330μH |

