

Eurolink (track 230 volts)


Electrified track in extruded aluminium.

Main voltage 230/250 V.

Electrical wiring is located in an extruded PVC insulated housing.

Conductor cross section is 4 mm2, for a current rating of 16 A corresponding to a 11.040 W (3x3.680 W) in a 3-phase scheme.

The track is supplied with a series of accesories which will successfully resolve all types of lighting installation requirements.

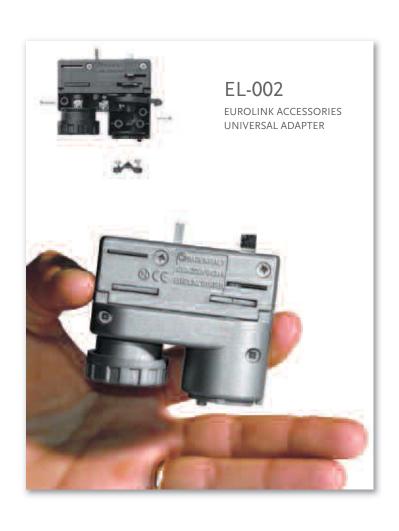



Available colours:



MATT WHITE



MATT BLACK (ON REQUEST)



ANODIZED





EL-003 LIVE END LX=LEFT / DX=RIGHT



EL-010 DEAD-END



EL-016 STRAIGHT REINFORCEMENT



Eurolink



EL-007 MEAN CONNECTOR



EL-013 MECHANICAL ADAPTER



EL-004 90° JUNCTION




EL-005 LINEAR JOINT
EL-006 (WITHOUT ELECTRIC CONTACT)



EL-011 TJUNCTION



EL-009 WIRE SUSPENSION KIT ONLY BLACK



EL-012 x JUNCTION

