









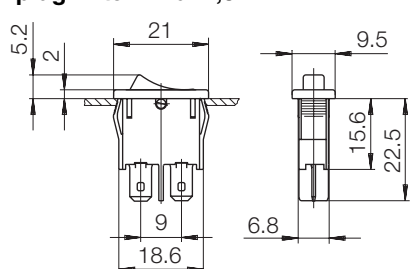

<p>rocker switch</p> <p>single pole ST-switch rocker and housing PA white contact pairing Ag/Cu silver-plated terminals silver-plated</p> <p>contact type: delamination contact</p> <p>life endurance mech: 75.000 electr 4(1): 50.000 6(2): 10.000</p> <p>suitable for appliances of protection class II</p>	<p style="text-align: center;">Description of basic version</p> <p style="text-align: right;">plug-in terminal 4,8</p>  <p style="text-align: center;">1901.</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>panel thickr</th> <th>length of cut-out</th> <th>width of cut-out</th> </tr> </thead> <tbody> <tr> <td>0,75 - 1,25</td> <td>19,2 - 0,1</td> <td>6,8 + 0,1</td> </tr> <tr> <td>1,25 - 2</td> <td>19,4 - 01</td> <td>6,8 + 0,1</td> </tr> <tr> <td>2 - 3</td> <td>19,8 - 01</td> <td>6,8 + 0,1</td> </tr> </tbody> </table> <div style="text-align: center; margin-top: 20px;">  <p>1 1a</p> </div> <p style="text-align: center;">snap-on fixing for panel thicknesses von 0,75 ... 3,0 mm</p>	panel thickr	length of cut-out	width of cut-out	0,75 - 1,25	19,2 - 0,1	6,8 + 0,1	1,25 - 2	19,4 - 01	6,8 + 0,1	2 - 3	19,8 - 01	6,8 + 0,1
panel thickr	length of cut-out	width of cut-out											
0,75 - 1,25	19,2 - 0,1	6,8 + 0,1											
1,25 - 2	19,4 - 01	6,8 + 0,1											
2 - 3	19,8 - 01	6,8 + 0,1											

<p style="text-align: center;">electrical rating and approval marks</p> <p>printed (injected):</p> <p>4(1)/250~ 5 E4 </p> <p>6(2)/250~</p> <p>6A 125 - 250V AC 1/8 HP R 58  </p> <p>not printed:</p>	<p style="text-align: center;">switching function</p> <p>ST-switch:</p> 
---	---

remarks

remarks

product No	kind of terminal	Po	S F	tolerances to basic model
1101 USA	P-I 4,8			
1102 x USA	P-I 4,8			rocker and housing black
1103 x USA	P-I 4,8			rocker and housing black marking white 
1104 USA	P-I 4,8			rocker and housing black marking white 
1105 USA	P-I 4,8			rocker and housing black marking white 
1401 Y USA (01116)	P-I 4,8*			rocker and housing black marking white  * with cable and plug 