

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** FK Technics, spol. s r.o.

**Supplier's address:** Product management, Koněvova 1883/62, 130 00 Praha 3 - Žižkov Praha, CZ

**Model identifier:** 4739444

## Type of light source:

Lighting technology used:	other FL	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	G10q		
Mains or non-mains:	NMLS	Connected light source (CLS):	Ne
Colour-tuneable light source:	Ne	Envelope:	-
High luminance light source:	Ne		
Anti-glare shield:	Ne	Dimmable:	No

## Product parameters


Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	22	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 450 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	6 500
On-mode power ( $P_{on}$ ), expressed in W	22,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,312 0,336	

(a) - : not applicable;

(b) - : not applicable;

Luminous Intensity Distribution Diagram

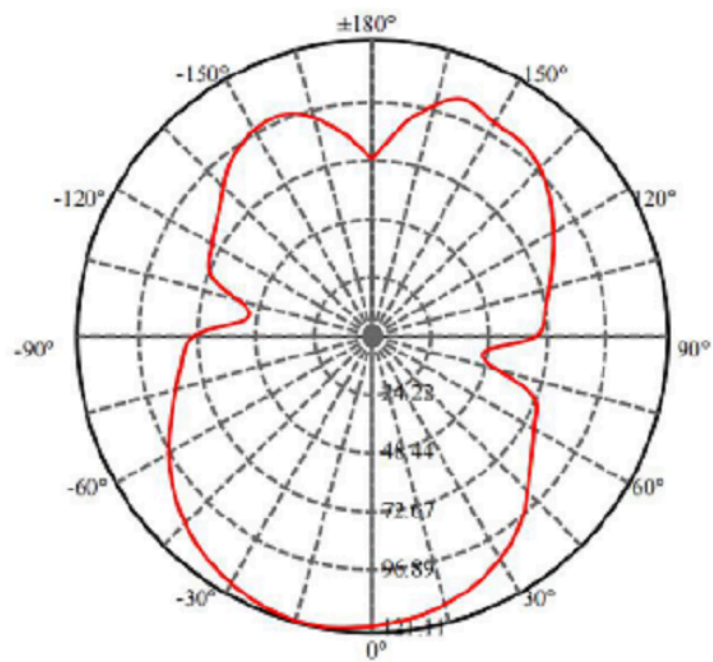

Spectral power distribution

